

Figure 1

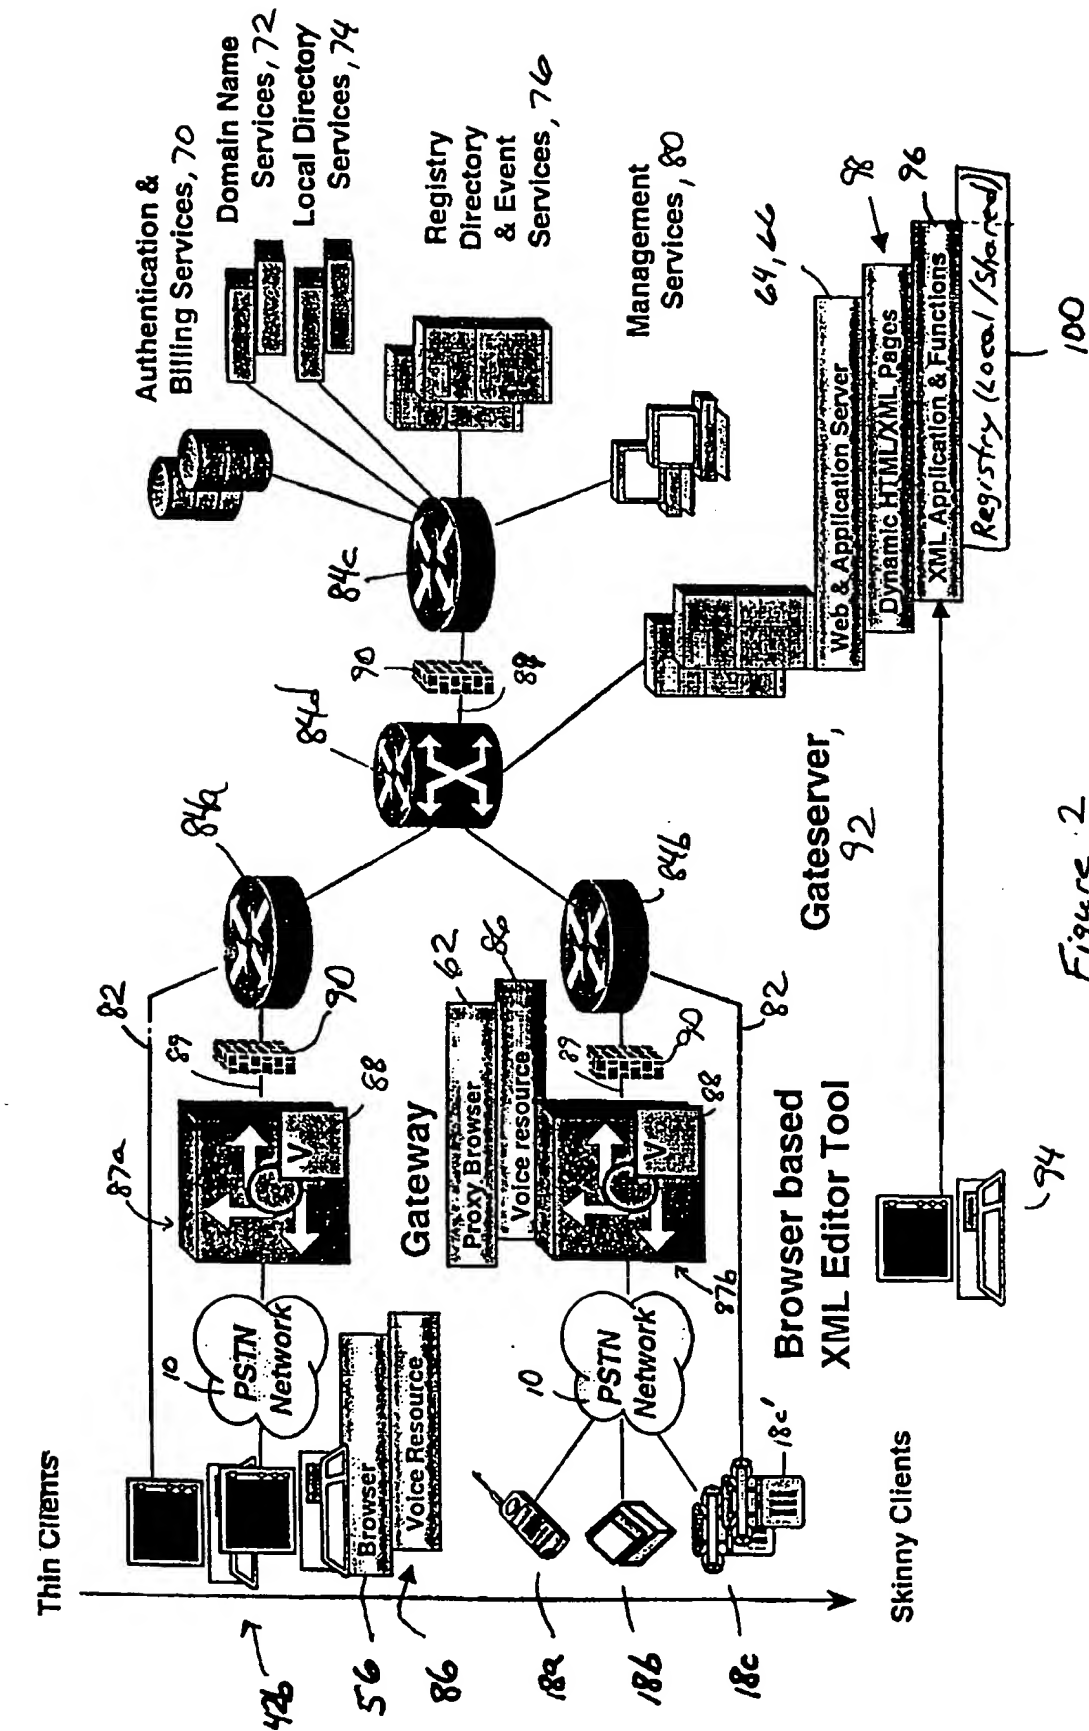


Figure 2

```
<state      sesid = "12345" >
```

106a → `<item name="IMAP_Uid" value="user1"/>`

108a → <item name: "IMAP_PW" value = "pass1"/>

```
110a -> <item      name: "IMAP Uid"    value =
```

```
112a / "reach sub menu.xml"/>
```

114a <item name: "Line" value = "(703) 555-1212"

➔ `<subsession value= "2" >`

00000000 → <item name: "IMAP Uid" value = "user2"/>

1106 → <item name: "IMAP_PW" value = "abxy"/>

1126 → <item name: "IMAP_Uid" value = "connect_rq.xml"/>

114/ → <item name: "Line" value = "(703) 555-1234"

</subsession>

</state>

Figure 3

Figure 4

